

INDELAGUE GROUP

INDELAGUE ROXO lighting




OVERVIEW

GLAM RANGE						
						
	GLAM	GLAM S4	GLAM S8	GLAM Magnet	GLAM /WE	GLAM /W
Type of Application	  					
Light Distribution						
Dimensions	Suspended: Ø 30x150 mm Ø 30x300 mm Ø 30x450 mm Ø 30x600 mm Spotlight: Ø 30x80 mm Ø 30x150 mm Ø 30x300 mm Recessed: Ø 59 mm	Suspended: Ø 30x150 mm Ø 30x300 mm Ø 30x450 mm Ø 30x600 mm		Suspended: Ø 30x150 mm Ø 30x300 mm Ø 30x450 mm Ø 30x600 mm * Spotlight: Ø 30x80 mm Straight line: 567 mm 1128 mm 1408 mm **	Spotlight: Ø 30x80 mm (95x170x54 mm)	Spotlight: Ø 30x80 mm (160x120x34 mm)
Optical System	14° Lens ▼ 47° Lens ▼ Oval Lens ▼		14° Lens ▼ 47° Lens ▼ Oval Lens ▼ bLINE  bGLARE 		14° Lens ▼ 47° Lens ▼ Oval Lens ▼	
Colour Temperature	2700K 4000K					
Finishes	<ul style="list-style-type: none"> <li style="width: 50%;">○ White <li style="width: 50%;">● Golden eye <li style="width: 50%;">● Grey <li style="width: 50%;">● Sahara <li style="width: 50%;">● Black <li style="width: 50%;">● Autumn <li style="width: 50%;">● Blue <li style="width: 50%;">● Rusty chain <li style="width: 50%;">● Green <li style="width: 50%;">● Pure chocolate <li style="width: 50%;">● Yellow <li style="width: 50%;">● Mist <li style="width: 50%;">● Red <li style="width: 50%;">● Dark rock <li style="width: 50%;">● Jungle <li style="width: 50%;">● Carbon 					
Ceiling Roses	See page 17			Trimless Recessed Surface Mounted	--	
Track System	--			Trimless Surface Mounted Suspended	--	

*
Ø 30x600 mm is not available for double version.

**
1408 mm only available for bLINE version.


MINIMALISM AND TECHNOLOGY

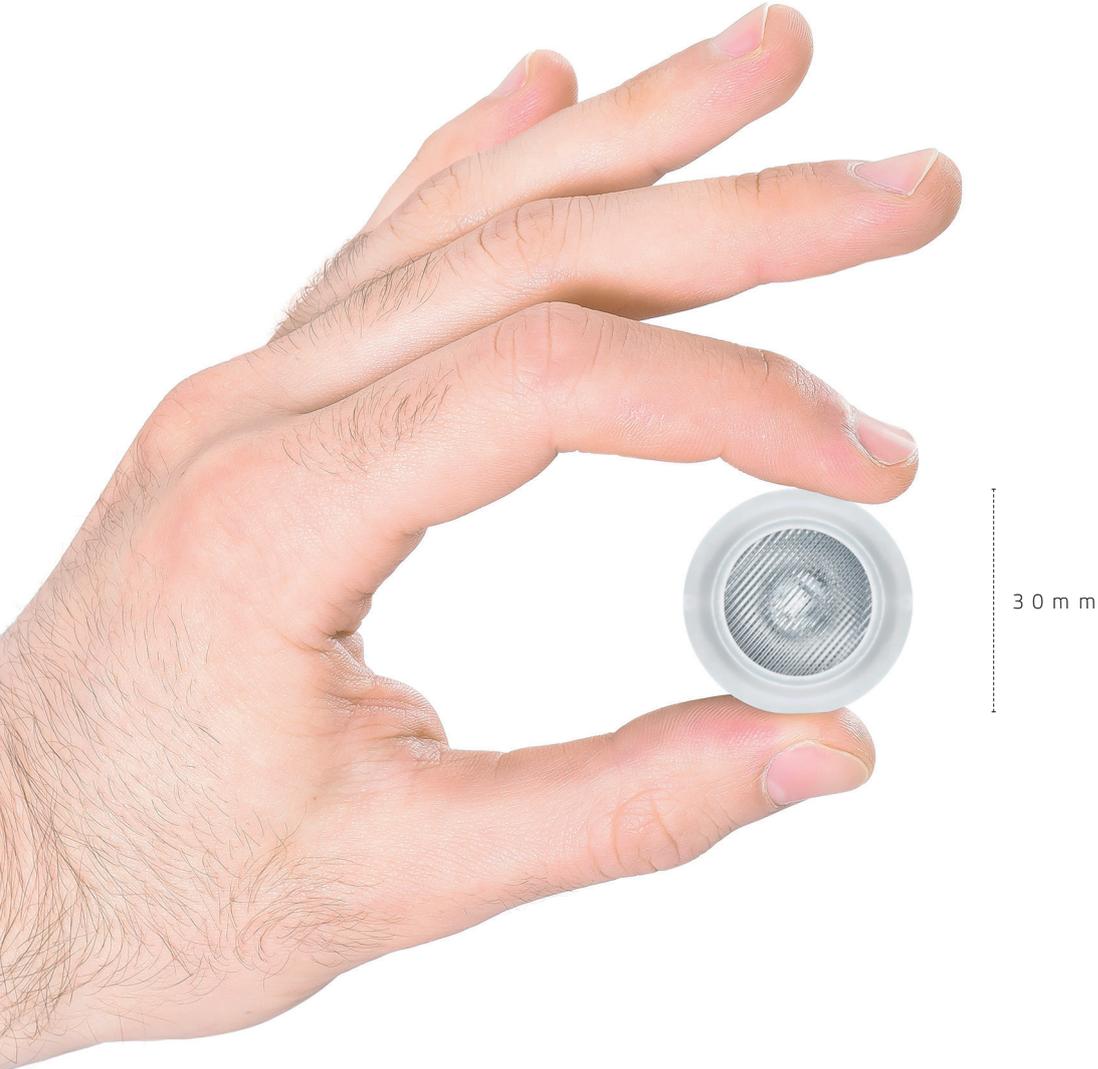

Shown in real size



BODY



LED



FIXING SYSTEM



14° LENS



47° LENS



OVAL LENS




DECORATIVE
TRIM

GLAM
RANGE


GLAM




GLAM Magnet

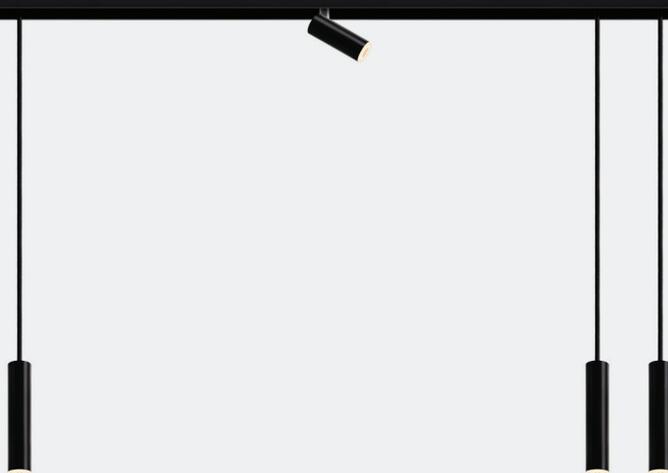

GLAM S4

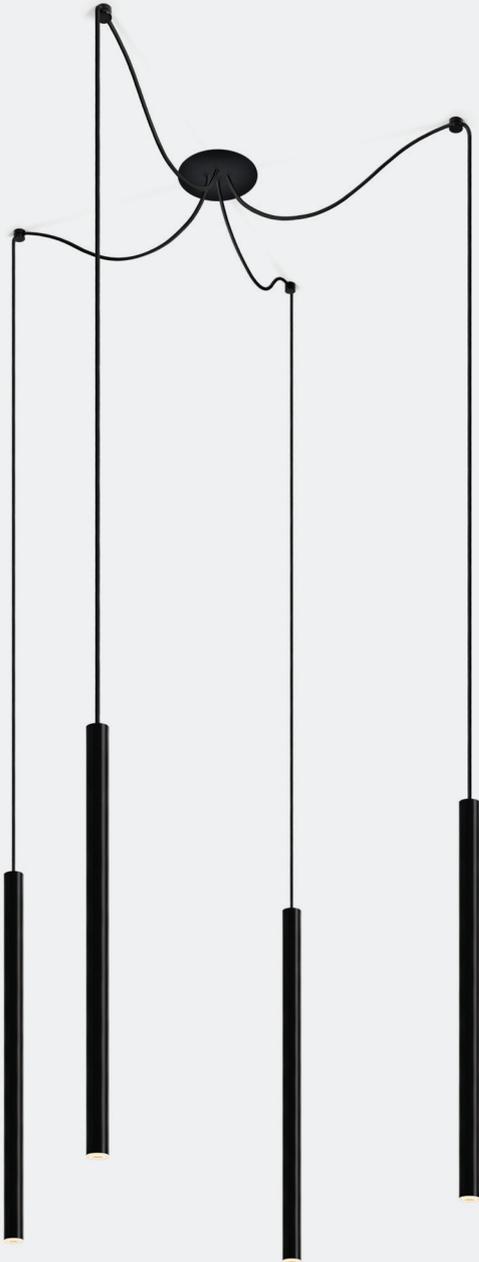

GLAM S8

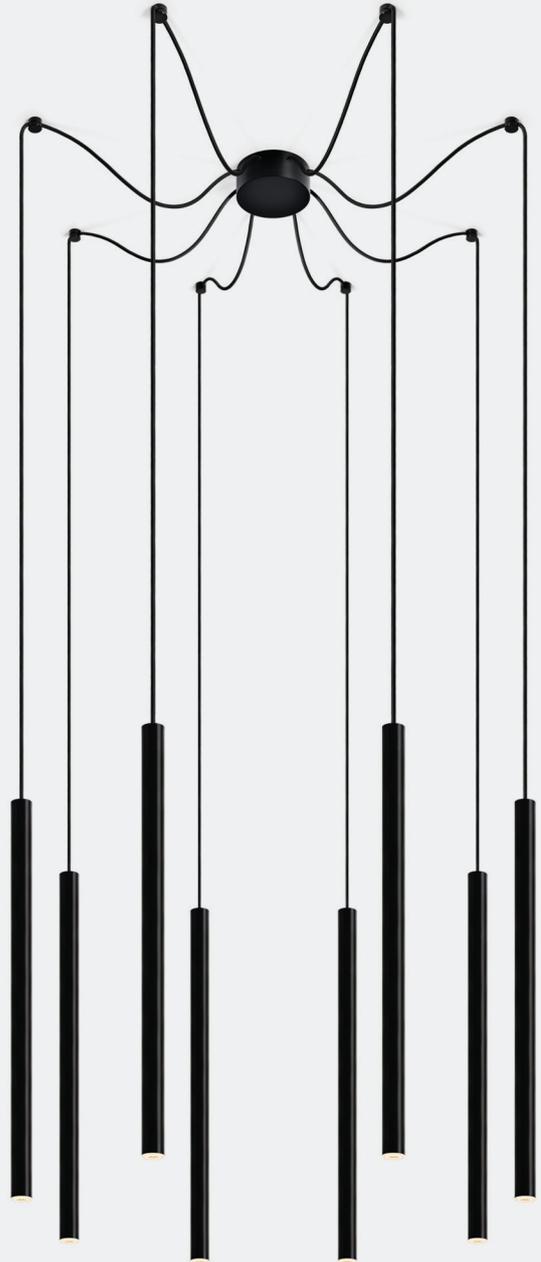

GLAM / WE



GLAM / W




CREATE SPACES
THROUGH LIGHT







OPTICAL SYSTEM

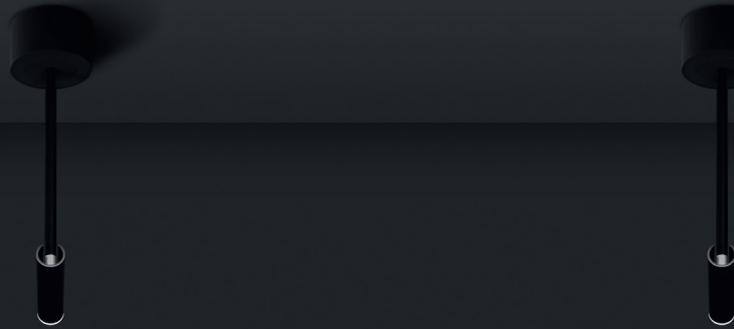


14°




47°





OVAL FLOOD



Orange Current Supply Cable



Black Current Supply Cable



Brown Current Supply Cable



White



Grey



Black



Blue



Green



Yellow



Red

FINISHES



Sahara

Autumn

Golden Eye

Rusty Chain

Pure Chocolate

Jungle

Mist

Dark Rock

Carbon





**3 SIMPLE STEPS TO
CHOOSE YOUR PRODUCT**

1

CHOOSE
CEILING ROSE

2

CHOOSE
INSETS

3

CHOOSE OPTICAL
SYSTEM

	Individual	Individual or Continuous Line
Trimless	 	  
Recessed	 	  
Surface	 	  

Suspended	Spotlight	Recessed	Blank cover
   	  		

14° Lens



47° Lens



Oval Lens



INSETS





S U S P E N D E D




SPOTLIGHT



CONTINUOUS LINE



ADJUSTABLE
90°+355°

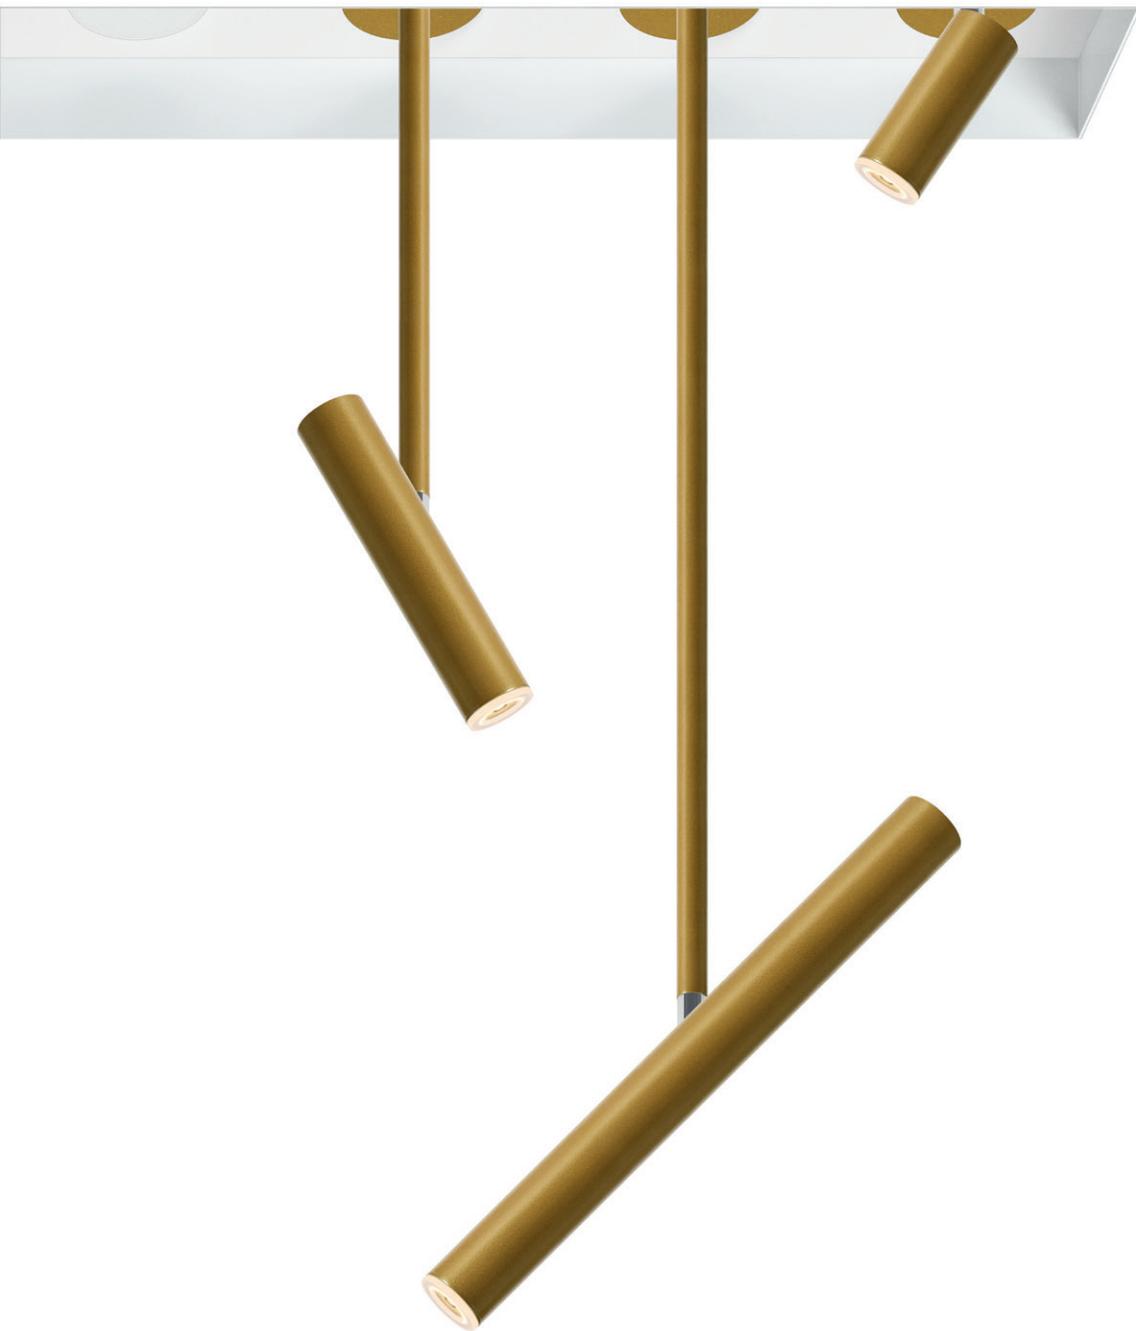

CLIP-IN SYSTEM



CLICK







CLICK





CLICK





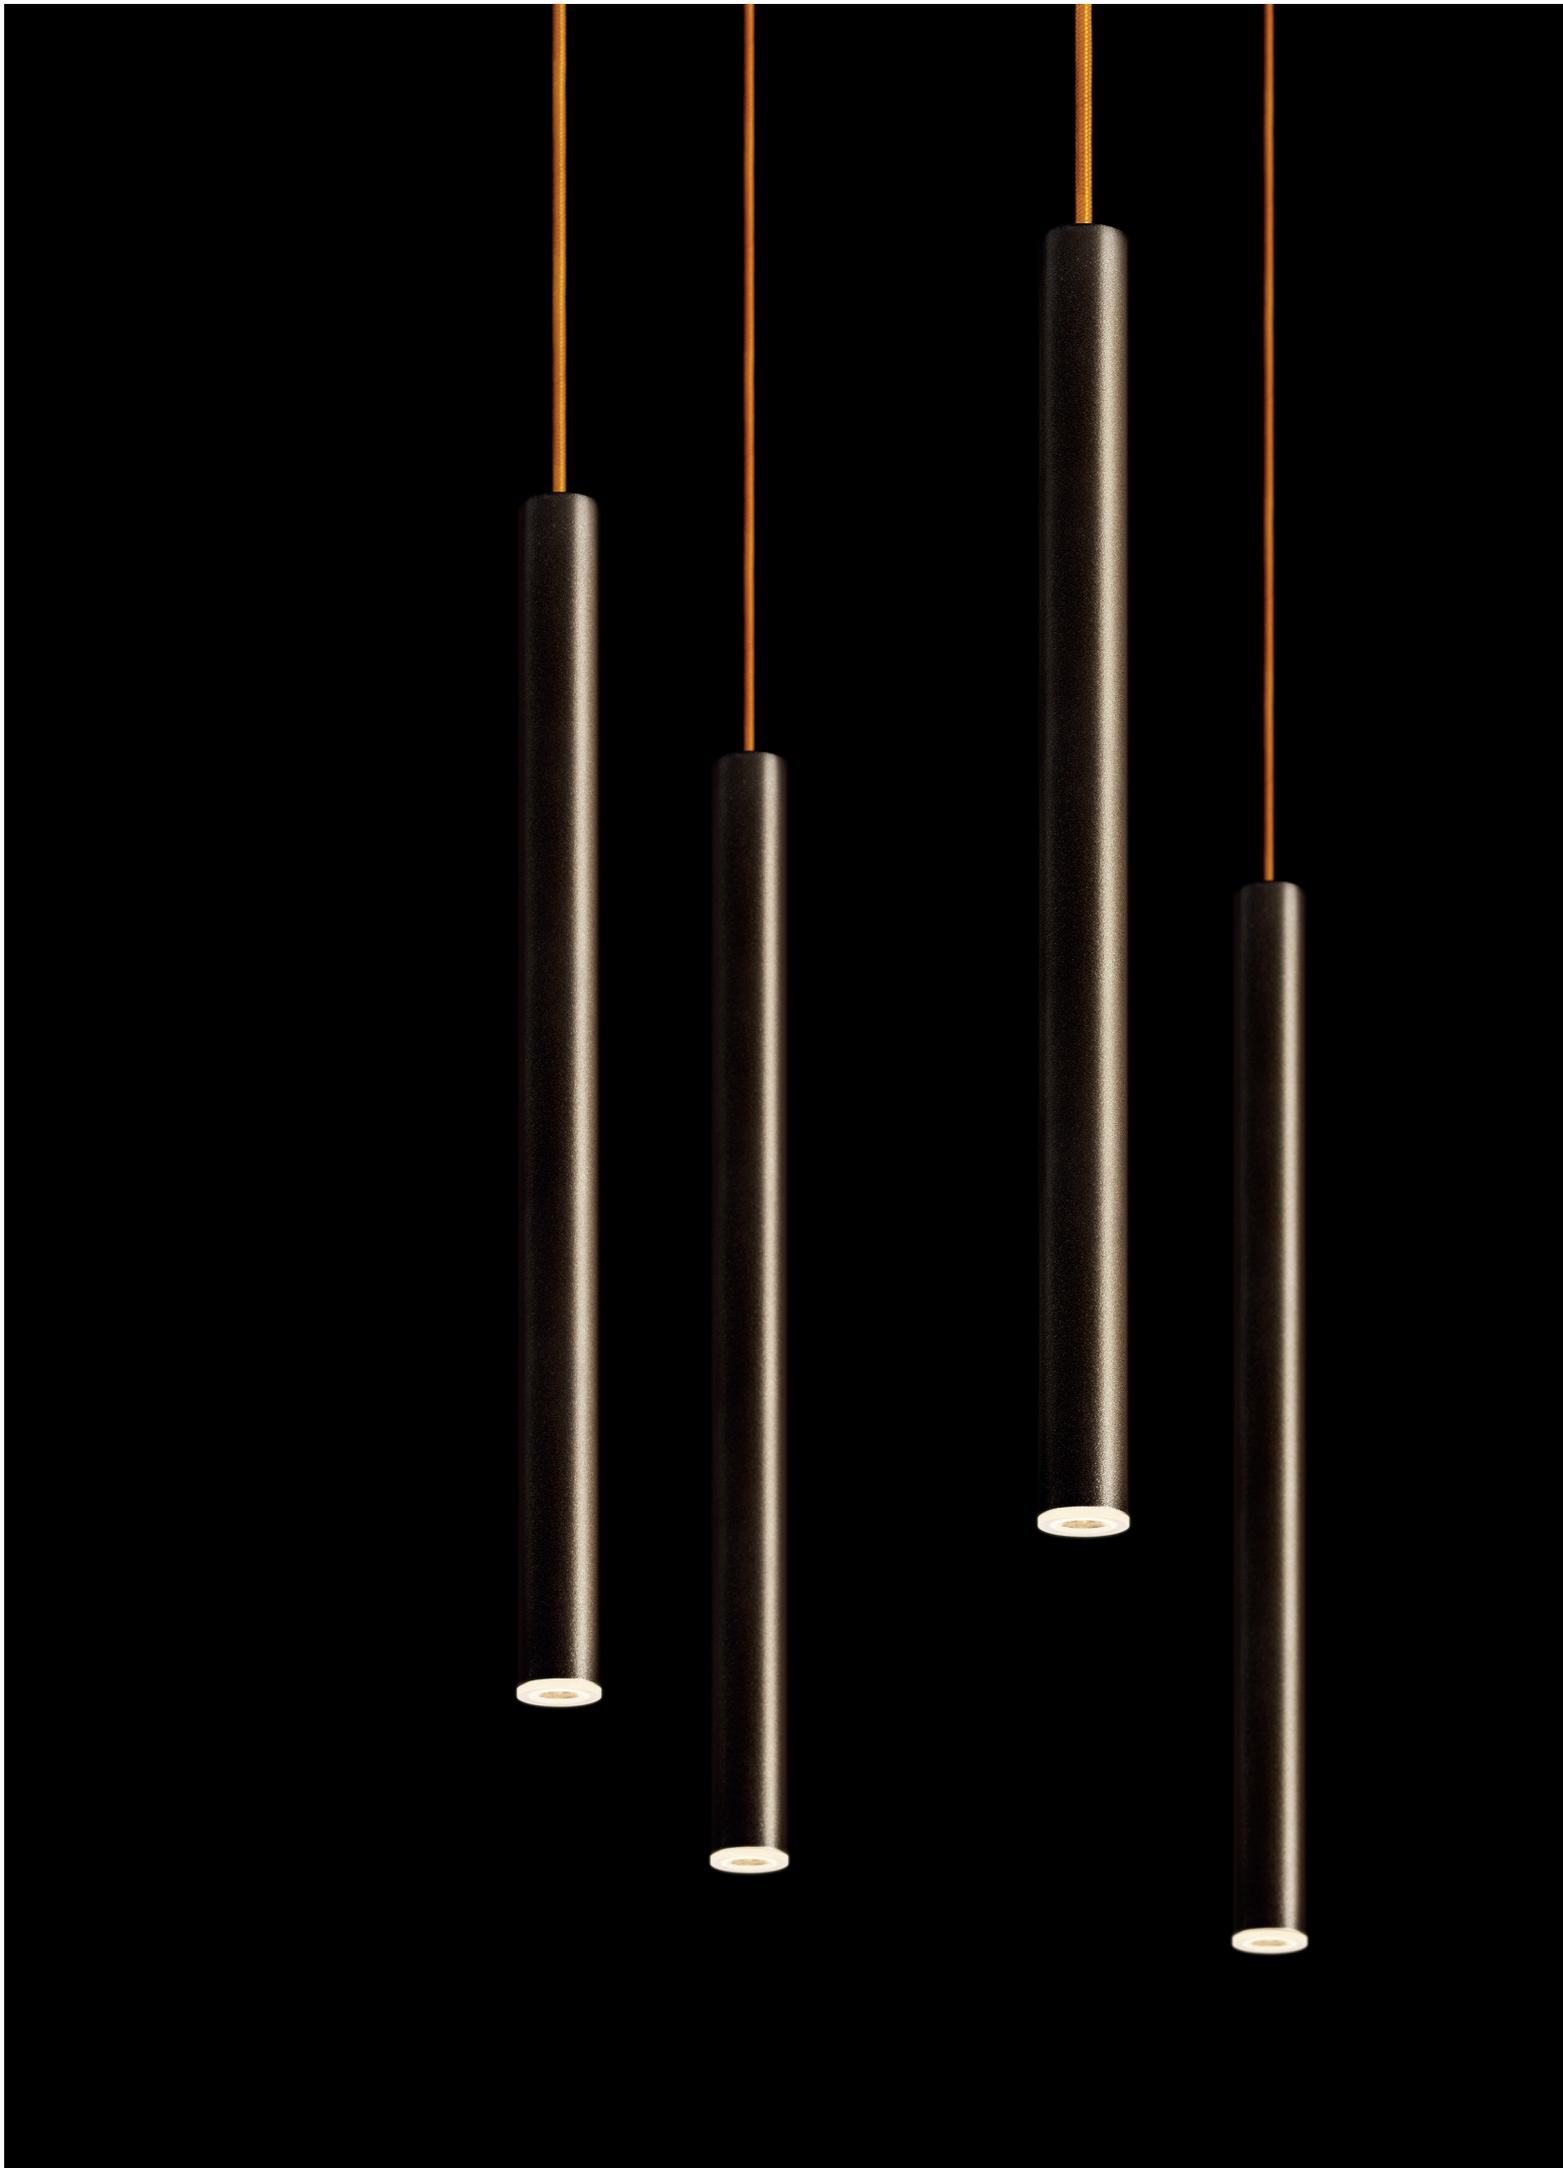


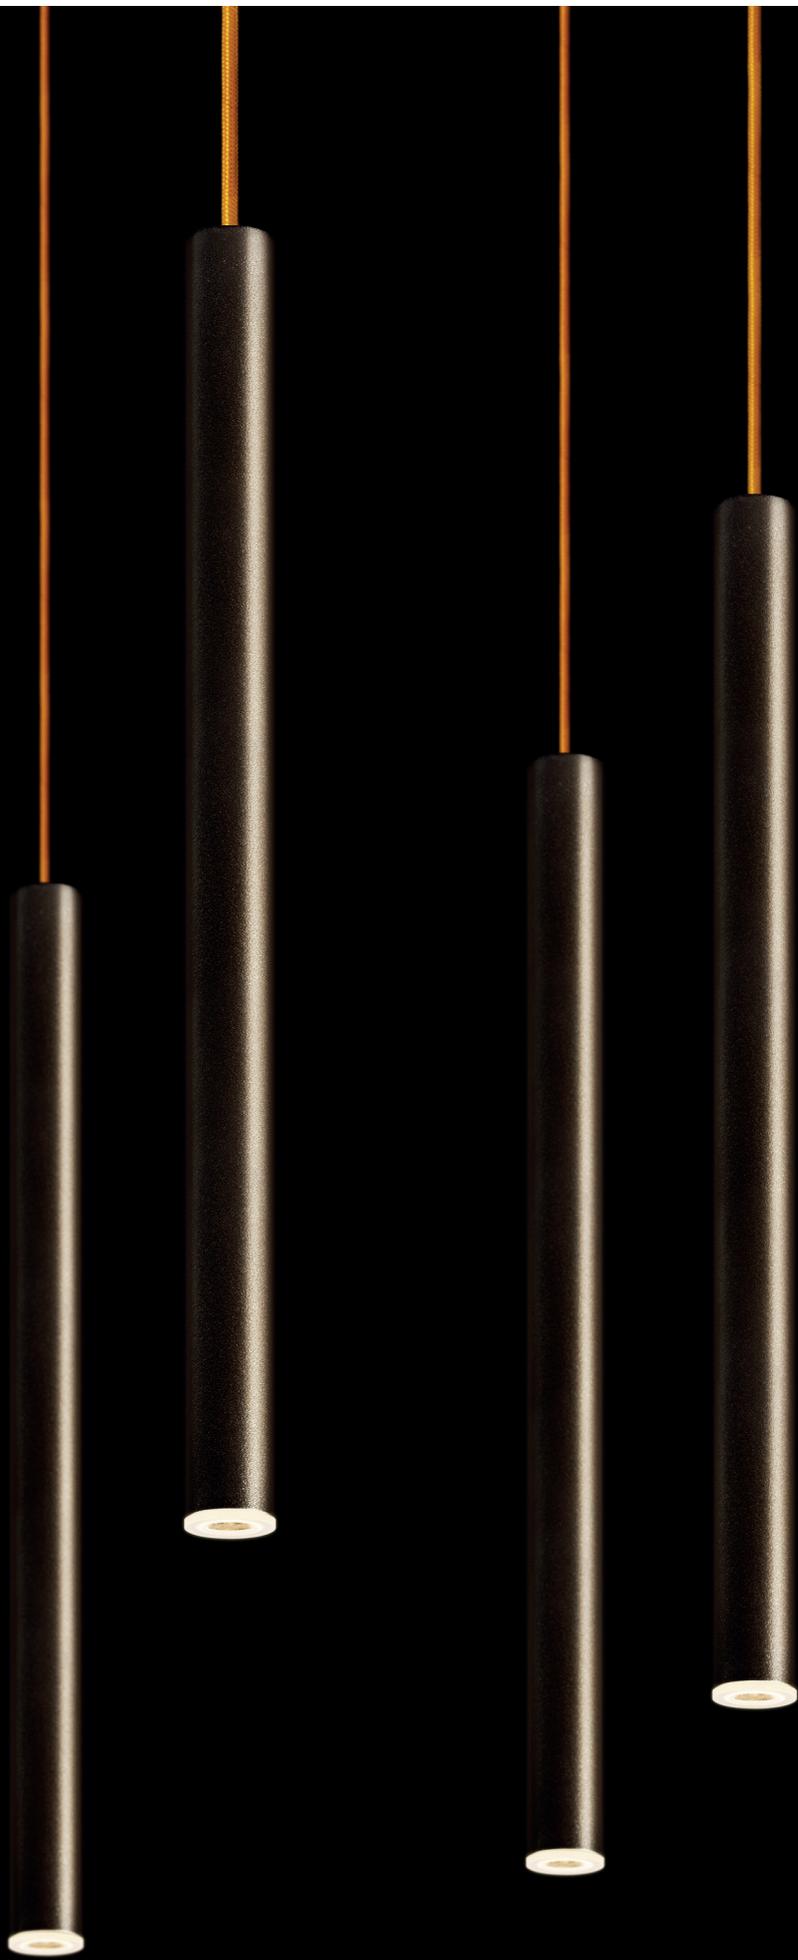


4 MODULES
SUSPENDED

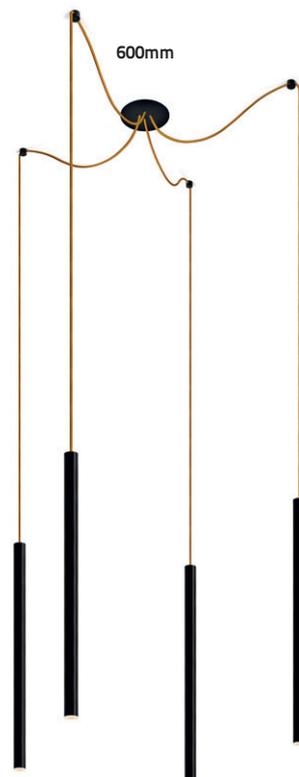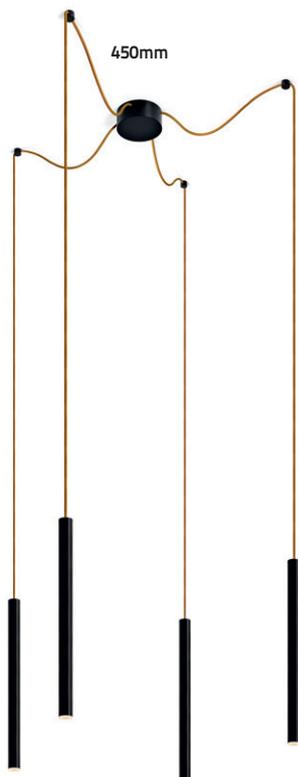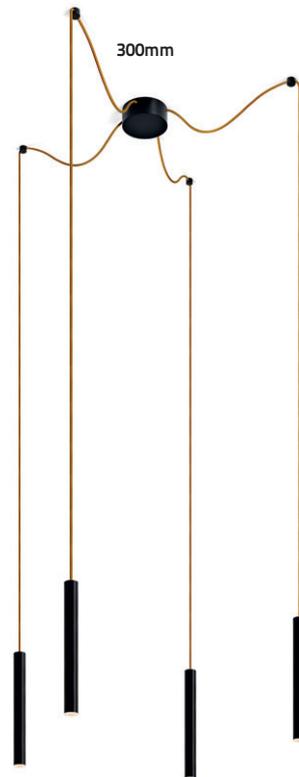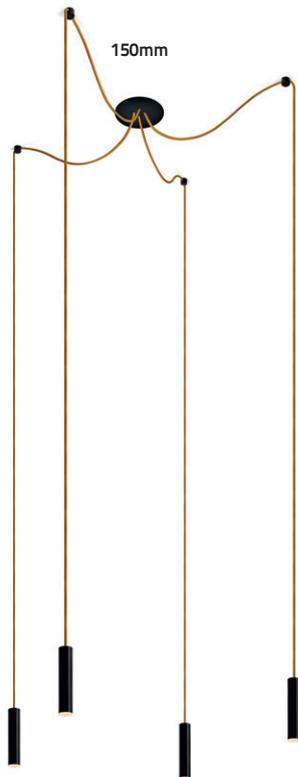

8 MODULES
SUSPENDED

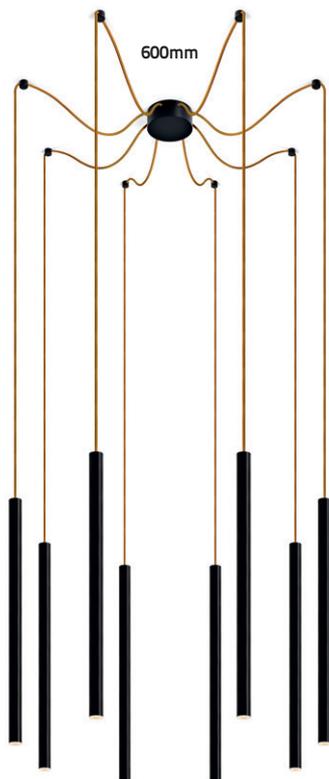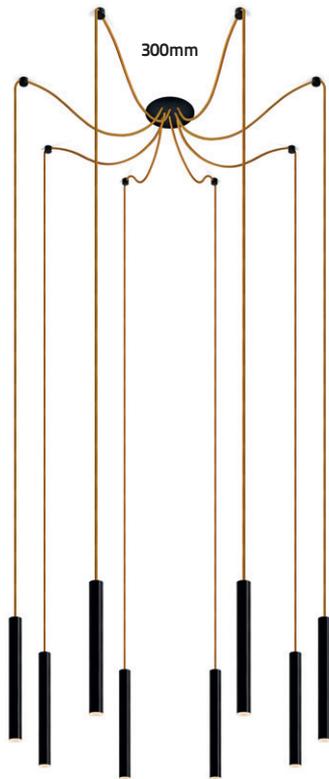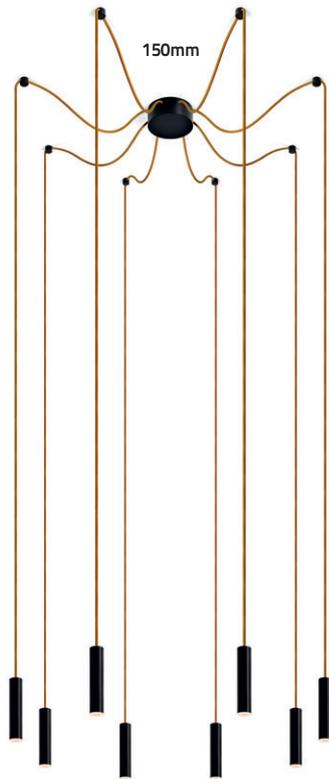


MAGNETIC TRACK SYSTEM

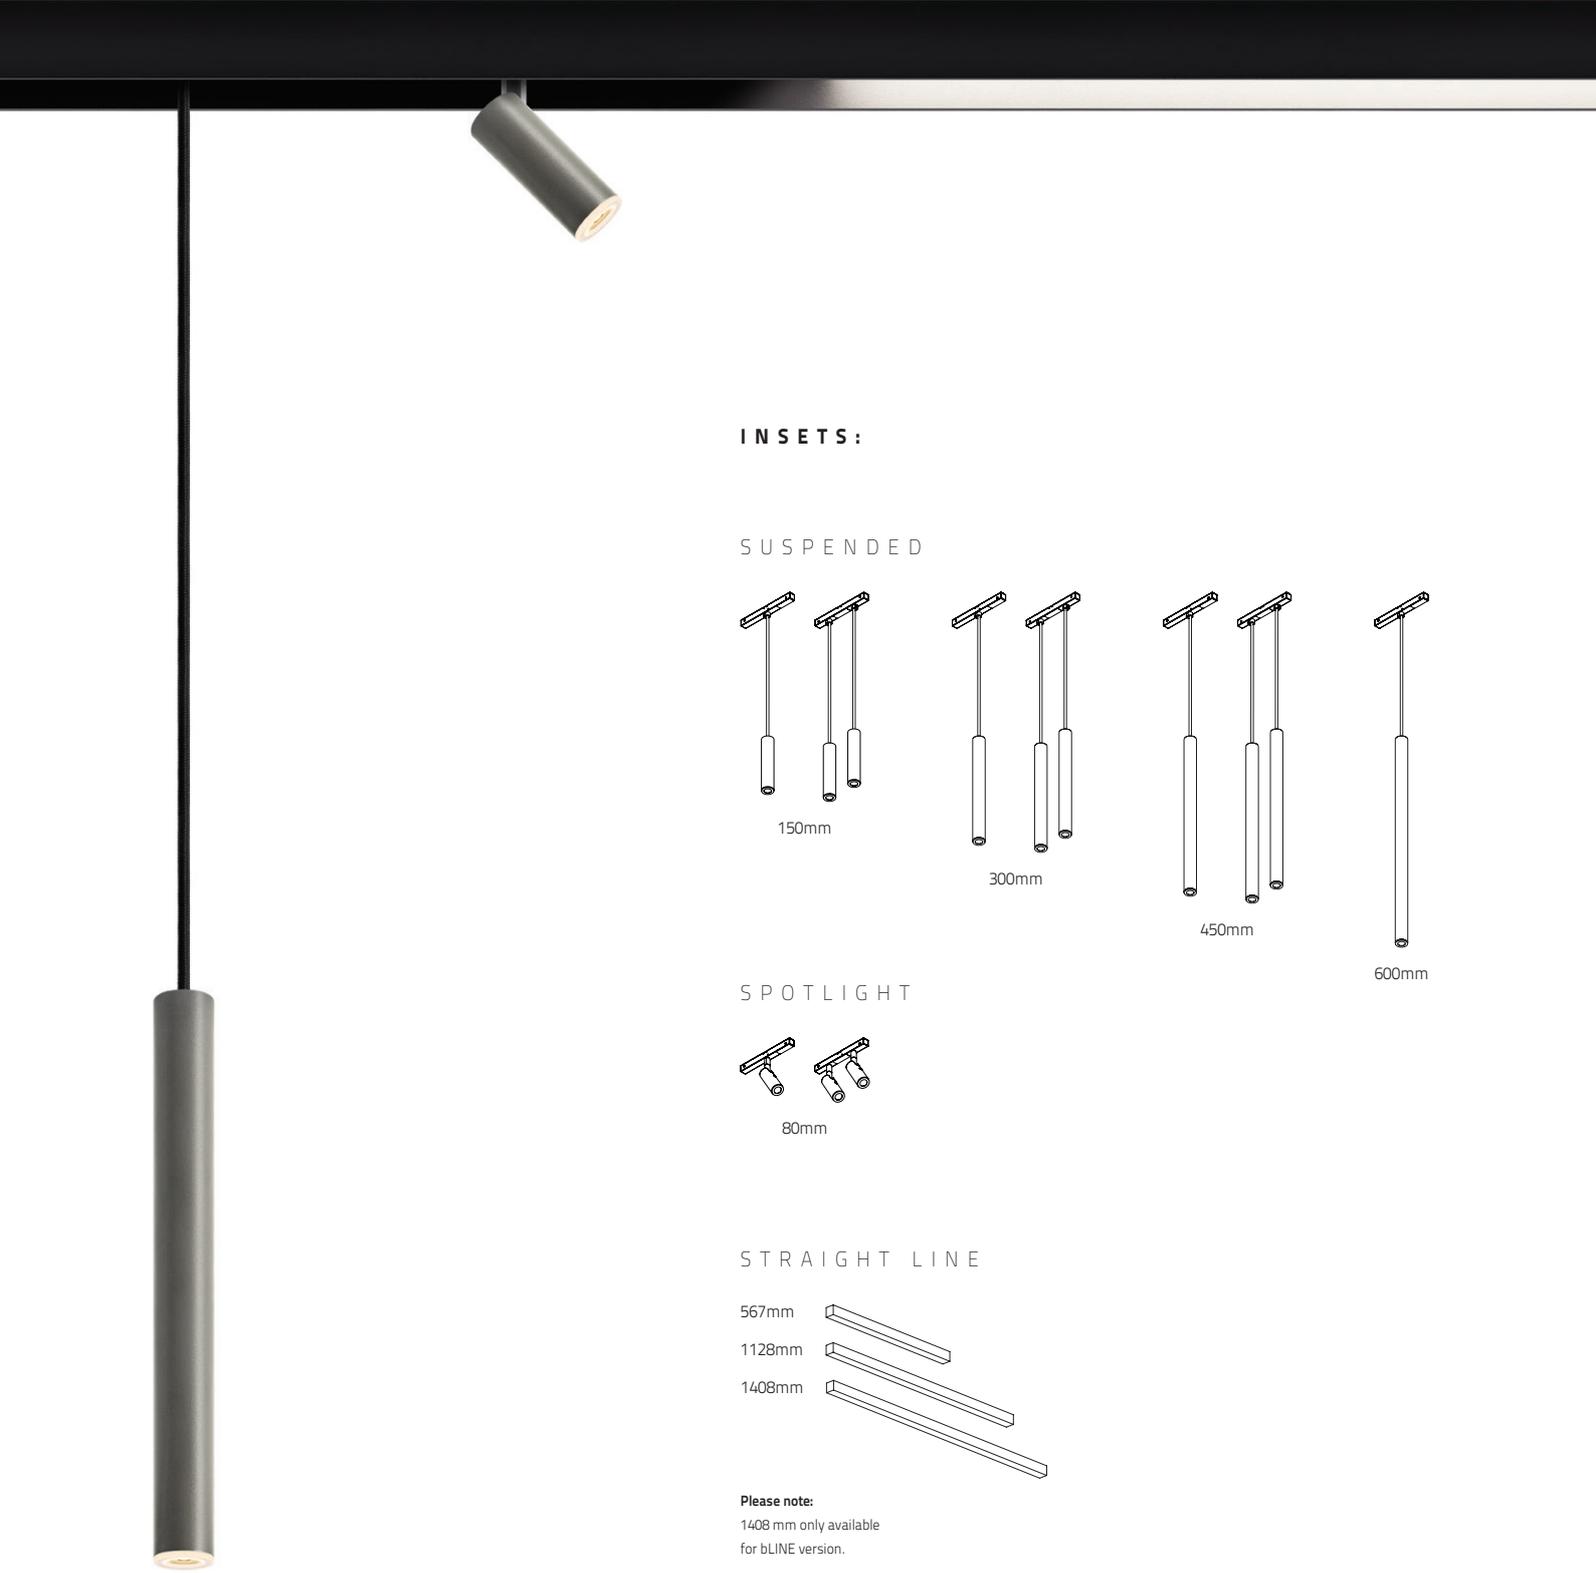


INSETS:


SUSPENDED




150mm



300mm




450mm



600mm

SPOTLIGHT



80mm

STRAIGHT LINE

567mm



1128mm





1408mm



Please note:

1408 mm only available
for bLINE version.

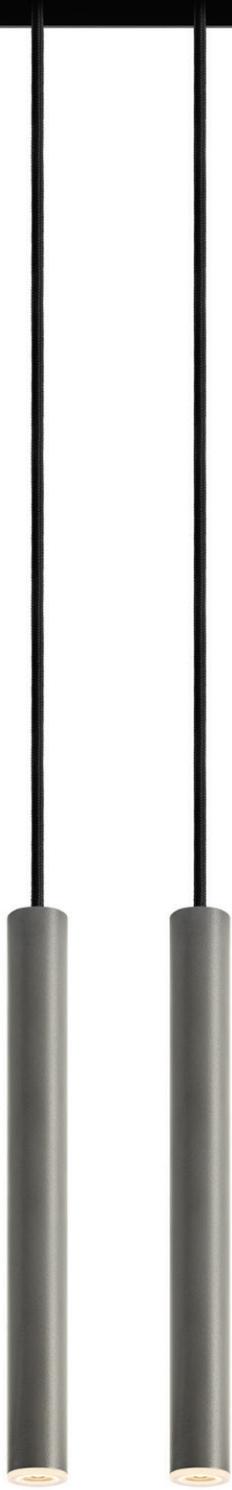

TRACK SYSTEM :

TRIMLESS




74x54mm



SURFACE MOUNTED
SUSPENDED




26,2x52,5mm



MAGNETIC
CLIP-IN SYSTEM



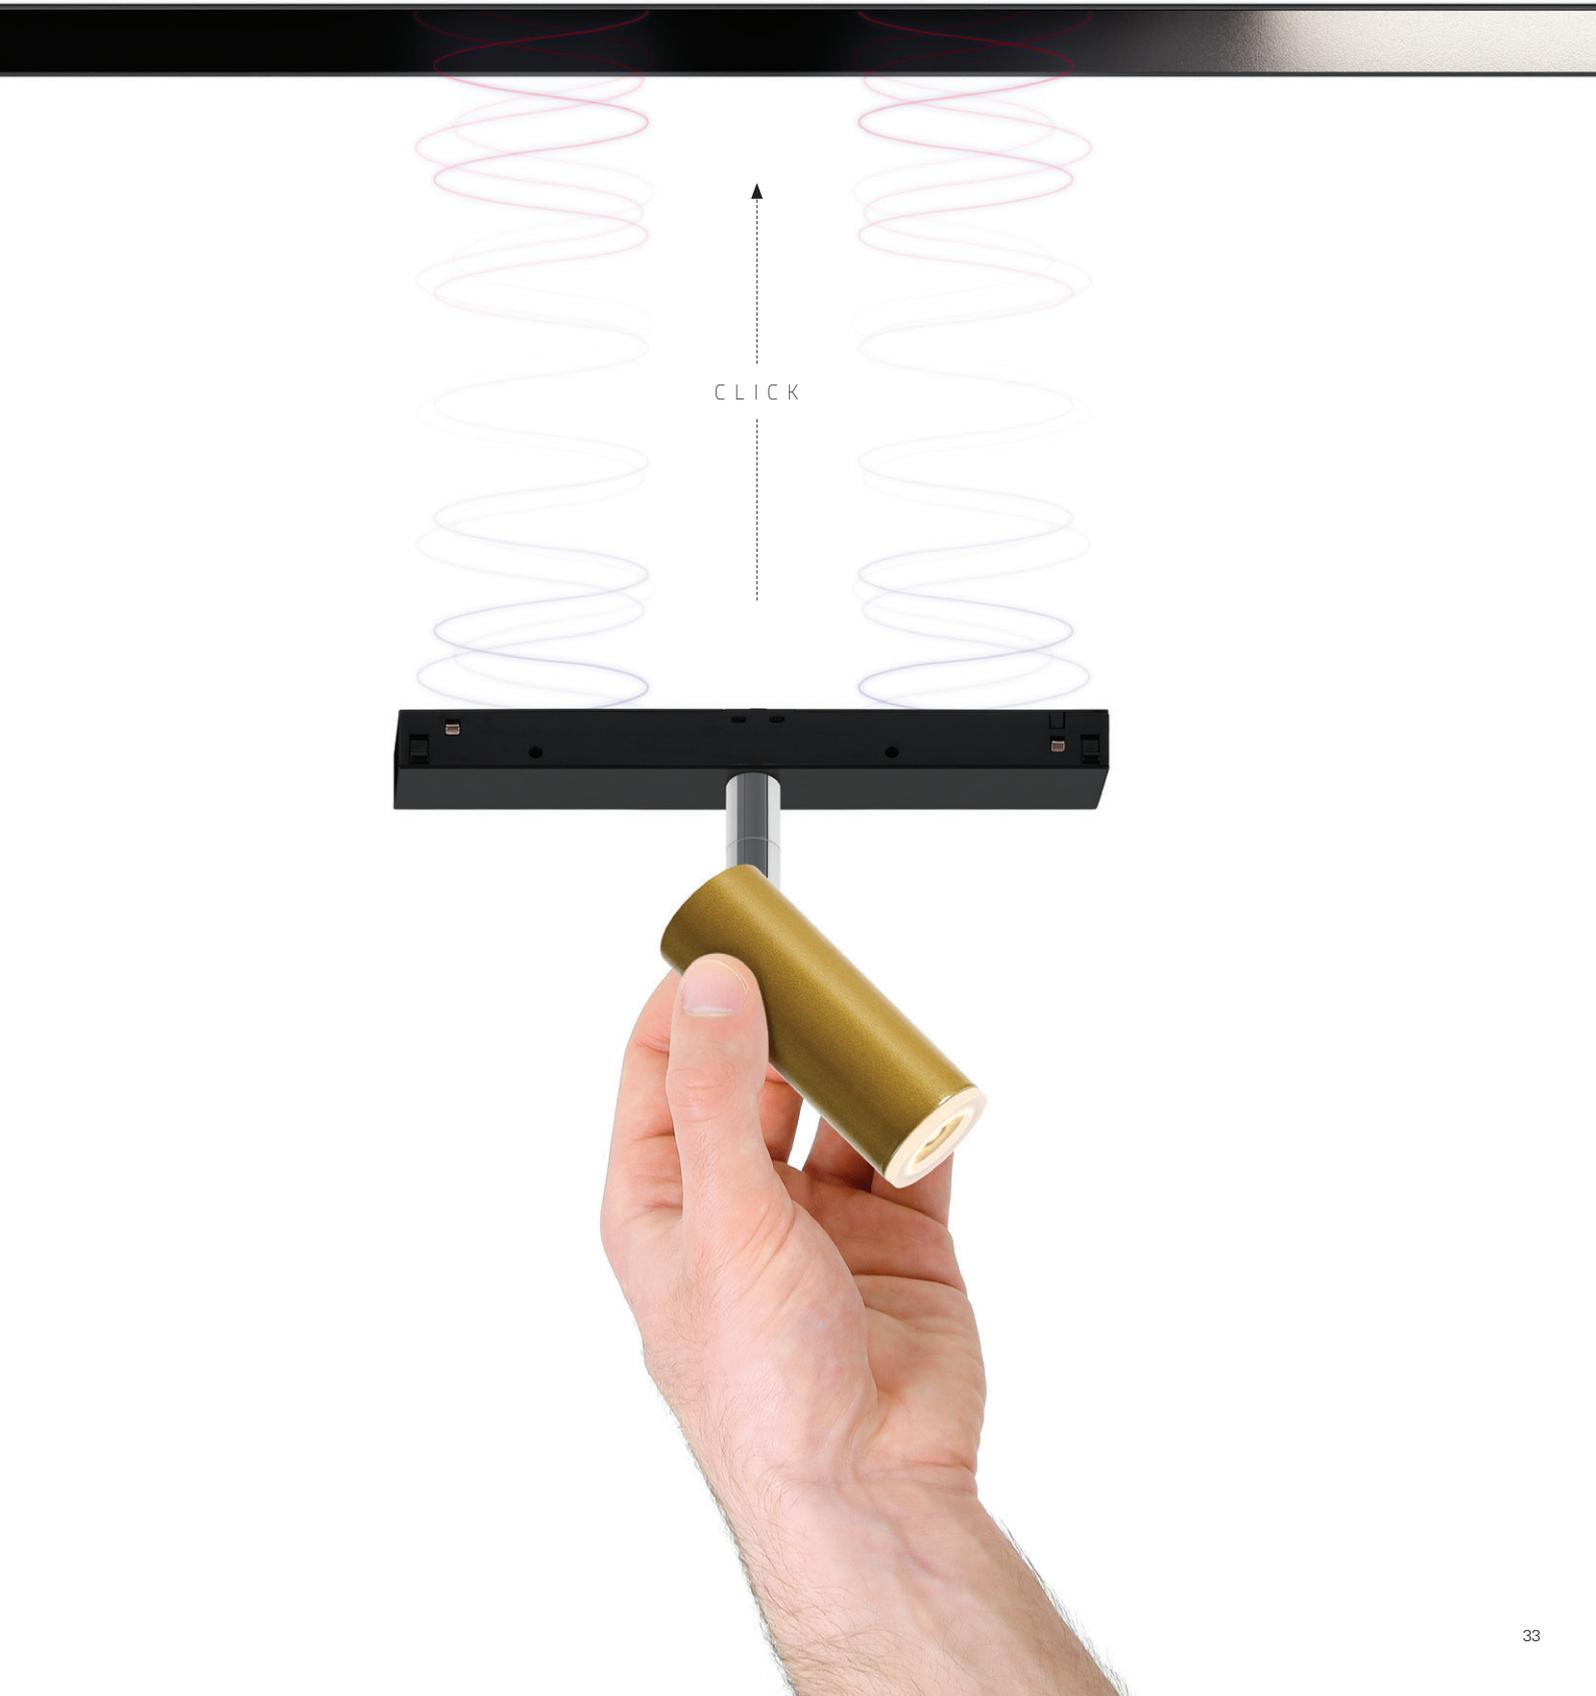





WALL
RECESSED





WALL
SURFACE



ADJUSTABLE
90° + 355°




ON/OFF
SENSOR



USB
CONNECTION



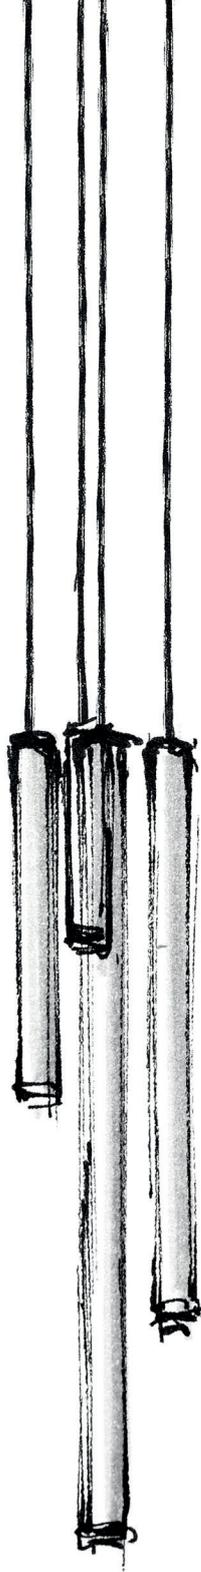

INDELAGUE GROUP

HEADQUARTERS

INDÚSTRIA ELÉTRICA DE ÁGUEDA S.A.
Rua da Mina 465 | Covão
Zona industrial EN1 Norte
Apartado 106 / 3754-909
3750-792 Trofa
ÁGUEDA | PORTUGAL
GPS: 40°36'5.84"N 8°27'4.38"W
T. +351 234 612 310 | F. +351 234 624 058
indelague@indelague.pt
WWW.INDELAGUE.COM

UNITED KINGDOM

ROXO LIGHTING LIMITED
roxo.london@roxolighting.com
WWW.ROXOLIGHTING.COM

SPAIN

INDELAGUE ESPAÑA, S.L.
Avenida del Ejército, nº 8 - 1º C
C.P. 15006 | A CORUÑA | ESPAÑA
comercial@indelague.com
WWW.INDELAGUE.COM

All data contained in this brochure does not constitute any commitment to INDELAGUE - Indústria Eléctrica de Águeda, S.A. . The company itself, reserves the right to change or modify any information stated without prior notice. The reproduction of this brochure or any part of it is prohibited. Electric /Optical data are subject to an initial tolerance of +/- 10%. Tolerance of colour temperature: +/- 150 K. Unless stated otherwise, the technical data represent rated values for an ambient temperature of 25°C.

Cofinanciado por:



UNIÃO EUROPEIA
Fundo Europeu
de Desenvolvimento Regional